

HAND DRILL • dry drilling

Modell	Technical data	Speed range	Drill range	Order No
T1800-82	with spade and additional handle 230V, 1800W electric switch, collar 60mm, connection spindle M18x2,5mm, weight 4,6 kg, transport case	1300 rpm	Ø 30 – 90mm	0295 007 6024
T1800-162	with spade and additional handle 230V, 1800W electric switch, collar 60mm, connection spindle M18x2,5mm, weight 4,6 kg, transport case	920 rpm	Ø 30 – 162mm	0295 007 6034



HAND DRILL • wet drilling • 2- or 3-speed-gear

Modell	Technical data	Speed range	Drill range	Order No
T1850N-EL41	with spade and additional handle, 230V, 1800W, multifunctional electronic, collar 60 mm, multi-purpose spindle 1 1/4" UNC + R 1/2" BSP, weight 5,5 kg, PRCD-switch, transport case	730/1340 rpm	Ø30-112mm wet Ø30-162mm dry	0295 007 6032
T1MAN-EL41	with spade and additional handle, 230V, 2200W, multifunctional electronic, collar 60mm, multi-purpose spindle 1 1/4" UNC / 1/2" BSP, weight 7,3 kg, PRCD-switch, transport case	530/1280/ 1780 rpm	Ø20-152mm wet Ø20-250mm dry	0295 007 6027



HAND DRILL • wet drilling • 3-speed-gear

Modell	Technical data	Speed range	Drill range	Order No
EBM33S	with spade and additional handle, overload protection system, collar 60mm, 230V, 1800W, connection spindle 1 1/4" UNC + R 1/2", weight 5,2 kg, PRCD-switch	520/1400/ 2900 rpm	Ø15-152mm wet Ø25-152mm dry	0295 007 5073
EBM33F	dito, but with pistol grip	520/1400/ 2900 rpm		0295 007 5071



GÖLZ DRILL RIG KB 110

- Hand drill motor connection by swanneck system (60mm)
- Feed handle, left or right hand operation
- Angle adjustable up to 45° with accessories backside stilts
- Tool kit

Technical data	
Drill range:	Ø 10 – 152 mm
Weight:	6,4kg
Stroke:	490mm
Fastening:	anchor base
Dimensions (LxWxH):	370x200x790 mm
OrderNo:	0295 110 2000



GÖLZ DRILL RIG KB 110 Combo

- Hand drill motor connection by swanneck system (60mm)
- Feed handle, left or right hand operation
- Angle adjustable up to 45°, backside stilts included
- Tool kit

Technical data	
Drill range:	Ø 10 – 152 mm
Weight:	10 kg
Stroke:	490mm
Fastening:	anchor / vacuum base
Dimensions (LxWxH):	310x255x790 mm
OrderNo:	0295 110 2020



GÖLZ DRILL RIG KB 125

- Hand drill motor connection by swanneck system (60mm)
- Feed handle, left or right hand operation
- Angle adjustable up to 45°, backside stilts included
- Tool kit

Technical data	
Drill range:	Ø 10 – 162 mm
Weight:	12 kg
Stroke:	650mm
Fastening:	anchor / vacuum base
Dimensions (LxWxH):	505x360x890 mm
OrderNo:	0295 125 1000



ACCESSORIES

Article	Description	KB110	KB110 Combi	KB125	OrderNo
Backside stilts	application angle drilling device	○			0295 110 0004
Water collection ring	max. Ø 80mm	○	○		0295 110 0005
Water collection ring	max. Ø130mm	○	○		0295 110 0006
Water collection ring	max. Ø180mm			○	0295 125 0005
Water collection ring holder	incl. drill bit centering device	○	○	○	0295 110 0003
Adapter plate	for drill motors direct mounting	○	○	○	0295 110 0007
Vacuum hold down	for fixing under the anchor base foot up to Ø112mm	○			0295 110 0002
Vacuum set			○		0295 110 0012
Vacuum set				○	0295 125 0008
Fastening kit	Fischer FdBB	○	○	○	0295 110 0992



Vacuum cleaner IS1225
 Compact vacuum cleaner specially designed for working with power tools. With filters and a filter-cleaning system.
 230 V, 1200 W, 25 l container.
 For problematical dust of all kinds.
 LxWxH: 400x400x580 mm
0295 150 0119



Groove attachment and the attachment for drilling in corners
 for CARDI hand held core drilling machines with connection spindle R 1/2" BSP.
 With groove attachment and the attachment for drilling in corners you can drill precisely into a wall slot or into a heating niche. Small holes can be made precisely in a corner. The attachment easily screws on the spindle.
BD 502305



Centering device
 for hand held core drills. Facilitates precise drilling. Gas pressure spring is delivered with 60mm manacle ring. Gas pressure spring with rubber stopper, drill range up to 120mm.
0295 007 0080

 Gas pressure spring with rubber stopper, drill range up to 200mm.
0295 007 0081



Portable pressurised water tank
 for working without water hose connection, 10 litres capacity, 4 meter water hose.

 GARDENA-Hose coupling
0295 010 0011



Bits for dry drilling
 with cooler drill swivel upon request



Diamond drill bit for socket outlets
 with dust extraction and centre drill (see diamond tools price list)



Dustrotor 1/4" UNC
 for collecting dust during dry drilling in every kind of brickwork
 Drill bit connection 1 1/4" UNC (see diamond tools price list)

GÖLZ KB 110 Combi • Connection R $\frac{1}{2}$ " + 1 $\frac{1}{4}$ " UNC

- Light Aluminium drill rig 10kg
- Angle adjustable up to 45°, incl. Backside stilts
- Anchor / Vacuum base
- Stroke: 490mm
- incl. PRCD

Inclusive Tool and fastening kit

Motor	Power	Speed range	Drill range	Order No
T1-200EL	2,20 kW	385/920/1280 rpm	Ø20-162mm	0295 110 2300
EBL33	2,30 kW	480/1200/2500 rpm	Ø10-152mm	0295 110 2410



GÖLZ KB 125 • Connection R $\frac{1}{2}$ " + 1 $\frac{1}{4}$ " UNC

- Light Aluminium drill rig 12kg
- Angle adjustable up to 45°
- Anchor / Vacuum base
- Stroke: 650mm
- incl. PRCD

Inclusive Tool and fastening kit

Motor	Power	Speed range	Drill range	Order No
T1-200EL	2,20 kW	385/920/1280 rpm	Ø20-182mm	0295 125 2300
EBL33	2,30 kW	480/1200/2500 rpm	Ø10-152mm	0295 125 2410



GÖLZ KB 130 • with combined anchor/vacuum base • Connection 1 $\frac{1}{4}$ " UNC

- Robust drill rig with 18kg
- Angle adjustable up to 45°
- Quick release system „STS“
- Anchor / Vacuum base
- Stroke: 600mm

Inclusive Tool and fastening kit

Motor	Power	Speed range	Drill range	Order No
T1-200 EL	2,20 kW	385/920/1280 rpm	Ø20-200mm	0295 130 4100
T2-220 EL	2,57 kW	330/570/790 rpm	Ø35-220mm	0295 130 4300
T6-375 EL	3,42 kW	230/520/965 rpm	Ø20-250mm	0295 130 4200
KB130 DRILL RIG	anchor / vacuum base with quick release system (without engine + fastening kit) weight: 18kg			0295 131 1002



GÖLZ KB 130 • with anchor base • Connection 1 $\frac{1}{4}$ " UNC

- Robust drill rig with 17kg
- Angle adjustable up to 45°
- Quick release system „STS“
- Anchor base
- Stroke: 750mm

Inclusive Tool and fastening kit

Motor	Power	Speed range	Drill range	Order No
T6-375 EL	3,42 kW	230/520/965 rpm	Ø20-250mm	0295 135 4200
T9-450 EL	3,42 kW	210/360/600/1000 rpm	Ø20-250mm	0295 135 4900
BBM33L extra	3,30 kW	180/430/750 rpm	Ø50-250mm	0295 135 2300
HBM 100 Hydraulic	4,50 kW	300 rpm	Ø50-250mm	0295 135 3910
KB130 DRILL RIG	anchor base with quick release system (without engine + fastening kit) weight: 17kg			0295 135 1001



GÖLZ KB 140 • anchor/vacuum base • Connection 1¼" UNC

- Lightweight aluminium construction
- Angle adjustable up to 45°
- Feed handle, left or right hand operation
- Quick release system „STS“
- Stroke: 700mm

Inclusive Tool and fastening kit

Motor	Power	Speed range	Drill range	Order No
T1-200 EL	2,20 kW	385/920/1280 rpm	Ø30-200mm	0295 140 1500
T2-220 EL	2,57 kW	330/570/790 rpm	Ø35-200mm	0295 140 1000
T6-375 EL	3,42 kW	230/520/965 rpm	Ø20-250mm	0295 140 1600
BBM33L extra	3,30 kW	180/430/750 rpm	Ø50-250mm	0295 140 1300
KB140 DRILL RIG	with quick release system (incl. toolkit, without fastening kit), weight 12kg			0295 140 1010
Set of wheels				0295 140 0049



GÖLZ KB 140 • anchor base • Connection 1¼" UNC

- Motor quick release system GÖLZ "STS"
- Angle adjustable up to 45°
- Feed handle, left or right hand operation
- Stroke: 700mm

Inclusive Tool and fastening kit

Motor	Power	Speed range	Drill range	Order No
T6-375 EL	3,42 kW	230/520/965 rpm	Ø20-250mm	0295 140 2600
BBM33L	3,30 kW	180/430/750 rpm	Ø50-250mm	0295 140 2300
HBM 100 Hydraulic	4,50 kW	300 rpm	Ø50-250mm	0295 140 2400
KB140 DRILL RIG	with quick release system (incl. toolkit, without fastening kit), weight 14kg			0295 140 1011



GÖLZ KB 150 • electric motors • Connection 1¼" UNC

- Double twin column with drill carriage and manual lever
- Anchor base with socket fitting for column
- weight of drill rig: 27kg
- Stroke: 630mm
- Motor quick release system GÖLZ "STS"

Inclusive Tool and fastening kit

Motor	Power	Speed range	Drill range	Order No
T2-220 EL	2,57 kW	330/570/790 rpm	Ø35-200mm	0295 150 4300
T6-375 EL	3,42 kW	230/520/965 rpm	Ø20-300mm	0295 150 4500
T9-450 EL	3,42 kW	210/360/600/1000 rpm	Ø20-300mm	0295 150 4900
BBM33L extra	3,30 kW	180/430/750 rpm	Ø30-300mm	0295 150 2210
KB150 DRILL RIG	with quick release system (incl. toolkit, without fastening kit), weight 27kg			0295 151 1010



GÖLZ KB 150 • alternative drive motors • Connection 1¼" UNC / GÖLZ-3-bolt

Motor	Power	Speed range	Drill range	Order No
STIHL 2 stroke-engine	3,0 kW	600 rpm	Ø50-172mm	0295 150 6501
		300 rpm	Ø110-300mm	0295 150 0351
LZL 15 air engine 2,4kW air cons 3,3m³	2,4 kW	600 rpm	Ø50-150mm	0295 150 6600
		300 rpm	Ø110-300mm	0295 150 3600
HBM50 hydraulic	4,5 kw, oilflow 30lpm, 140 bar	610 rpm	Ø50-150mm	0295 150 3900
HBM100 hydraulic		300 rpm	Ø150-300mm	0295 150 3910
HBM160 hydraulic		190 rpm	Ø250-333mm	0295 150 3920

GÖLZ KB 150 • Accessories

Sewage Pipe Drilling Attachment (converting kit)	0295 150 0001
Set of standing plates for taking core samples (needs converting kit)	0295 300 0005
Angle drilling device	0295 150 0013
Vacuum plate	0295 150 0003

GÖLZ KB 250 • anchor base • Connection 1¼" UNC

- Quick release system „STS“
- Angle adjustable up to 45°
- Feed handle, left or right hand operation
- Stroke: 650mm

Inclusive Tool and fastening kit

Motor	Power	Speed range	Drill range	Order No
BBM33L extra	3,30 kW	180/430/750 rpm	Ø50-300mm	0295 250 2300
T6-375 EL	3,42 kW	230/520/965 rpm	Ø20-300mm	0295 250 4200
KB250 DRILL RIG	with quick release system (incl. toolkit, without fastening kit), weight 16kg			0295 250 1000



GÖLZ KB 250 • combi base • Connection 1¼" UNC

- Quick release system „STS“
- Angle adjustable up to 45°
- Feed handle, left or right hand operation
- Stroke: 650mm

Inclusive Tool and fastening kit

Motor	Power	Speed range	Drill range	Order No
BBM33L extra	3,30 kW	180/430/750 rpm	Ø50-300mm	0295 250 2310
T6-375 EL	3,42 kW	230/520/965 rpm	Ø20-300mm	0295 250 4210
KB250 DRILL RIG	with quick release system (incl. toolkit, without fastening kit), weight 17kg			0295 250 1010
Set of wheels				0295 250 0501



GÖLZ CD 400 / CD 401 • Connection 1¼" UNC

- Solid 90° drill rig
- Anchor base
- Feed handle, attachable left or right hand side
- Motor adapter plate for Dr. Bender, Cardi and WEKA Motors
- Stroke: 620mm

Inclusive Tool and fastening kit

Motor	Power	Speed range	Drill range	Order No
T6-375 EL	3,42 kW	230/520/965 rpm	up to Ø375mm	0295 400 2000
T9-450 EL	3,42 kW	210/360/600/1000 rpm	up to Ø400mm	0295 400 2100
BBM33L extra	3,30 kW	180/420/750 rpm	up to Ø400mm	0295 400 2200
CD400 DRILL RIG	with motor-mount-plate (incl. Toolkit, without fastening kit), weight 21,6 kg			0295 400 1010
CD401 DRILL RIG	incl. BorMatic500 autofeed adaption (incl. Toolkit, without fastening kit)			0295 400 1005



GÖLZ KB400 • Connection 1¼" UNC

- Special steel column with galvanized gear rack
- Combined slide and roller bearing carriage
- Angle drilling device, adjustable up to 45°
- Motor quick release system GÖLZ "STS - SUPER"
- Stroke: 750mm

Inclusive Tool and fastening kit

Motor	Power	Speed range	Drill range	Order No
T6-375 EL	3,42 kW	230/520/965 rpm	up to Ø375mm	0295 230 2700
T9-450 EL	3,42 kW	210/360/600/1000 rpm	up to Ø400mm	0295 230 2600
BBM33L extra	3,30 kW	180/430/750 rpm	up to Ø400mm	0295 230 1300
DX4L, 400V	4,25 kW	120/280/440 rpm	up to Ø400mm	0295 230 1420
HBM160 hydraulic	4,5kW	190 rpm	Ø250 - 400mm	0295 230 1900
KB400 DRILL RIG	quick release system GÖLZ STS-Super (incl. Toolkit, without fastening kit), weight 23 kg			0295 230 1520



Accessories	Order No
Set of wheels	0295 230 0200
Cross handle, 2 feed ranges, (direct, gear reduction 1:4)	0295 000 0833
Vacuum plate, max Ø 200mm	0295 230 0500

GÖLZ KB 500 • Connection 1¼" UNC

- Special steel column with galvanized gear rack
- Combined slide and roller bearing carriage
- Angle drilling device, adjustable up to 45°
- Stroke: 800mm
- Integrated set of wheels
- Motor quick release system STS-Super

Inclusive Tool and fastening kit

Motor	Power	Speed range	Drill range	Order No
T9-500 EL	3,42 kW, 230V	150/260/370/540 rpm	Ø100-500mm	0295 600 2750
Dolphin DX6L	6,00 kW, 400V	120/280/440 rpm	Ø150-500mm	0295 600 1310
HBM200 hydraulic	30l/min, 140 Bar	150 rpm	Ø400-600mm	0295 600 2100
KB500 DRILL RIG	with quick release system STS-Super, weight 36kg			0295 600 1530



Accessories	Order No
Cross handle, 2 feed ranges (direct, gear reduction 1:4)	0295 000 0833

GÖLZ BorMatic 500 • automatic feed

- Stitch drilling for large openings such as doors, windows, circular openings for spiral staircases
- Drills independently without operator, Useable with 230V electric drill motors from DR.BENDER and CARDI
- Drilling allowing the operator to use two or more drilling machines at the same time
- Drilling allowing the user to take care of water and other associated work during the drill
- 5 different feed speeds, Automatic feed reduction in reinforcement
- Automatic motor and feed cut off when drilling is finished or the drill bit lock up

Combination possibilities for drill rig KB400/KB500:		Order No
BorMatic500, 230V		0295 600 0536
Motor, complete with motor quick change system STS-SUPER, plug and socket KB400/KB500:		Order No
	Speed range	
BBM33L extra, 3,3kW	180/430/750 rpm	0295 011 5127
DRILL RIG, with motor quick change system "STS"		Order No
without motor)		0295 230 1520
KB500 (without motor)		0295 600 1530
Combination possibilities for drill rig CD401		Order No
BorMatic500, 230V		0295 600 0535
Motor, complete with plug and socket (CD401)		Order No
	Speed range	
BBM33L extra, 3,3kW	180/430/750 rpm	0295 007 5127
Anchor drill rig:		Order No
CD401 (without motor)		0295 400 1005



GÖLZ KB 1000 • Connection 1¼" UNC

- 2 DRILL RIGS GÖLZ KB 500 with GÖLZ "STS-SUPER"
- Traverse with "STS-SUPER" - connection for drill motor
- Angle drilling device, adjustable up to 45°
- Stroke: 800mm
- drill range: up to 1000mm

Complete system	Power	Speed range	OrderNo
HBM630 Hydraulic	5,9 kW	50 rpm	0295 610 2000
DRILL RIG SET KB1000	with GÖLZ STS-Super, weight: 36kg		0295 610 2010



Zubehör	Order No
Supporting roll	drill bit supporting
0295 610 0100	
Support jack	adjustable from 1,80 - 3,00m
0295 130 0030	



Vacuum pump C10
 safety-tank mounted
 incl. check valve
 Intake volume 115 lpm
 Tank capacity 10 l
 230 V, 0,75 kW, 50 Hz,
 1400 rpm, IP44
 weight: 27 kg
 Dimensions (LxWxH):
 340x360x620 mm
0295 010 0030



Vacuum pump VP45
 specially made for KB110, KB120
 Intake volume 45lpm
 Low pressure 0.7 bar
 230V, 50Hz, 2,2A
 Weight: 10kg
 Dimensions: (LxWxH):
 360x154x285mm
0295 010 0032



Vacuum pad
 for KB110 Combi
0295 110 0012
 for KB125
0295 125 0008
 for KB140
0295 140 0048
 for KB 250
0295 250 0050



Vacuum plate
 for drill rig with anchor base
 KB110 up to Ø 112 mm
0295 110 0002
 KB130/140/250/400
 up to Ø 200 mm
0295 230 0500
 KB150 with plug connection
0295 150 0003



Pressurised water tank
 10l capacity incl. gauge and
 4m water hose
 for KB200, KB300, KB350
 with brass-hose coupling
0295 010 0010
 for GÖLZ-electric core drilling
 machines with
 GARDENA-hose coupling
0295 010 0011



Industrial vacuum cleaner IS1225
 Compact vacuum cleaner,
 specially designed for working
 with power tools, space saving,
 230V, 1200W, 25 l, special plastic
 container, 2 large wheels
 2 guide rolls with brake,
 appliance sockets with automatic
 on/off switch, electromagnetic
 pulse filter cleaning,
 automatic vibrator
 Line cord length 8m
 Size (LxWxH): 400x400x580 mm
 Flexible suction hose: 8m
 Rubber nozzle 23cm
0295 150 0119



Watercollection ring
 for draining of flushing water in
 connection with wet vac

KB110, max. Ø 80 mm
0295 110 0005
 KB110, max. Ø 130 mm
0295 110 0006
 KB125, max. Ø 180 mm
0295 125 0005
 KB130, max. Ø 112 mm
0295 130 0020
 KB130, max. Ø 162 mm
0295 130 0021
 KB140, max. Ø 162 mm
0295 140 0120
 KB150, max. Ø 172 mm
0295 150 0020
 KB400/500, max. Ø 200 mm
0295 600 0020

Water collection ring holder
 incl. indication for drill hole
 centering

KB110/KB125
0295 110 0003

Spare diaphragm
 KB110, max. Ø 80 mm
0295 110 0009
 KB110, max. Ø 130 mm
0295 110 0010
 KB125, max. Ø 180 mm
0295 110 0011
 KB130, max. Ø 112 mm
0295 130 0027
 KB130/140, max. Ø 162 mm
0295 130 0026
 KB150
0295 150 0025
 KB400/500
0295 600 0025




Watercollection ring
 self-priming by industrial vacuum
 cleaner.
 up to Ø 70 mm
0295 150 0011
 up to Ø 150 mm
0295 150 0019
 up to Ø 250 mm
0295 150 0022



Underwater pump
 Portable, for core drilling with a
 water supply from a water barrel
 220 V, 50 Hz
 80 l/min at 6,5 m height
1003 000 01



Wet and dry vac SW55
 Industrial vacuum cleaner
 55 l special plastic container for
 working with concrete dust,
 mortar and lime residues.
 Line cord length: 10m
 Flexible suction hose: 2,7m
 220/240 W, 50/60 Hz
 Power: 220/240V, 50/60hz,
 1000 Watt
 Dimensions: (WxH): 900x440 mm
 Weight 22 kg
0295 150 0117



Abrasive sharpening plate
 to sharp re-tipped drill bits
 Dimensions (LxWxH):
 350x260x50 mm
 elastic
0268 180 001



Support jack
 for bracing a drill rig
 between floor and ceiling
 adjustable from 1,80 - 3,00m
0295 130 0030



Dowel and anchors
Rawl-dowel M12, drill size
 up to Ø 20 mm
0263 370 0012



Wedge anchor M12
 drill-size Ø 16mm
0263 340 0014



Anchoring rod fitting
 for Rawl-dowel
0267 120 0023



Anchoring rod fitting
 for wedge anchors
0267 120 0024



Nut
0267 120 0011



Washer
0295 000 0331

**Setting tool for
 wedge anchors**
0263 340 0112

T.C. tipped hammer drill O.D.
 Ø 20x200 mm
0266 522 0200

T.C. tipped hammer drill O.D.
 Ø 16x210mm
0266 521 6210

Anchor system Fischer FdBB

Safety fixing with the patented
 expansion clip

Innovative bolt anchor concept:
 consisting of:



Expansion element Ø 16 mm
0263 340 0011



Spindle bolt
0267 120 0027



Tightening nut
0267 120 0019



Washer
0295 000 0331

GÖLZ DRILL MOTORS 230 V



Model	Speed range	Power	Connection	Weight	Order No
T1-EL-41	530/1280/1780 rpm	2,20 kW	1¼" + R½" BSP	7,0 kg	0295 007 6002
T1-200 EL	385/920/1280 rpm	2,20 kW	1¼" UNC	7,3 kg	0295 007 6001
EBL33	450/1200/2500	2,30 kW	1¼" UNC	6,5 kg	0295 007 5051
T2-220 EL	330/570/790 rpm	2,57 kW	1¼" UNC	9,8 kg	0295 007 6000
BBM33 L	180/430/750	3,30 kW	1¼" UNC	13,2 kg	0295 007 5027
BBM33 LL	155/375/650	3,30 kW	1¼" UNC	9,8 kg	0295 007 5041
T6-375 EL	230/520/965 rpm	3,42 kW	1¼" UNC	13,5 kg	0295 007 6031
T9-450 EL	210/360/600/1000 rpm	3,42 kW	1¼" UNC	14,5 kg	0295 007 6015
T9-500 EL	150/260/370/540 rpm	3,42 kW	1¼" UNC	14,5 kg	0295 007 6030

Order code: *Motor with STS 0295 010
 **Motor with STS-Super 0295 011

GÖLZ DRILL MOTORS 400 V • water cooled



Model	Speed range	Power	Connection	Weight	Order No
Dolphin DX4L	120/280/440 rpm	4,25 kW	1¼" UNC	19,0 kg	0295 007 5040
Dolphin DX6L	120/280/440 rpm	6,00 kW	1¼" UNC	24,5 kg	0295 007 5039

Order code: *Motor with STS 0295 010
 **Motor with STS-Super 0295 011

GÖLZ HYDRAULIC MOTORS

Model	Drill range	Speed range	Order No
HBM50	Ø 50 - 150 mm	610 rpm	0295 007 7050
HBM100	Ø 120 - 250 mm	300 rpm	0295 007 7100
HBM160	Ø 250 - 400 mm	190 rpm	0295 007 7160
HBM200	Ø 400 - 600 mm	150 rpm	0295 007 7200
HBM400	Ø 500 - 700 mm	80 rpm	0295 007 7400
HBM630	Ø 800 - 1200 mm	50 rpm	0295 007 7600

GÖLZ DRILL MOTOR ACCESSORIES

Quick release system for electric drill motors	
Type	Order No
1. STS (KB130-KB150)	0295 130 0402
2. STS-Super (KB400/500)	0295 600 1110
3. STS-Super-Kombi (KB130-500)	0295 600 1130

Quick-release ring	Order No
Slider XL for Cardi and Dr.Bender	0295 150 0112
Quick release ring Dolphin	0295 150 0113


Distance plates for drill rigs	
Type	Order No
4 hole, 20 mm	BD502545
6 hole, 20 mm	BD501899
6 hole, 60 mm	BD501654



Slider XL



Quick release ring Dr. Bender

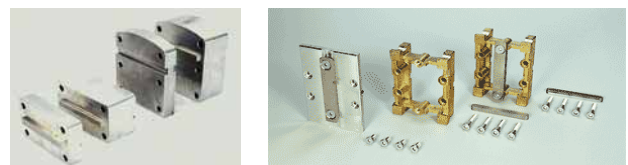

* with GÖLZ STS
 ** with GÖLZ STS Super

GÖLZ HAND HELD DRILLS Petrol FB100 • FB200

FB100

- Drill range Ø30-150mm in brickwork
- Drill range Ø30-60mm in reinforced concrete
- Dimensions (LxWxH): 410x530x350mm
- Exhaust gas hose, approx. 4 meters
- weight: 8,3kg without drillbit



FB200

- Drill range Ø50-200mm
- Exhaust gas hose, approx. 4 meters
- Pressurized water tank, 10liters
- Dimensions(LxWxH): 480x300x490 mm
- weight: 13kg without drillbit



Model	Motor	Power	Speed range	Order No
FB100	STIHL-2-stroke-motor drillbit connection R $\frac{1}{2}$ " BSP (without pressurized water tank)	1,3kW (1,8 HP)	580/1370/2980 rpm	0295 150 1040
FB200	STIHL-2-stroke-motor drillbit connection GÖLZ-3-hole-flange (with pressurized water tank)	3,0kW (4,1 HP)	600 rpm	0295 150 1050

Accessories for KB	Order No
Anchor DRILL RIG KB130 (without fastening kit), weight 15kg	0295 135 1002
Water tank, 10 liters	0295 010 0011

GÖLZ KB200 CORE DRILLING MACHINE

- Coresampling in asphalt and concrete pavements
- Coring to place hand railings
- Coring to place barrier posts
- Coring of ceiling openings
- Core bilster lights at airfields
- Core installation of motorway crash barriers
- weight: 47kg

Inclusive tool and fastening kit, pressurised water tank and exhaust gas hose!



Technical data - Extent of delivery
Twin column with standing plates and roller guides, stroke 450mm
STIHL- 2-cycle engine, 3.0KW (4.1HP)
Speed gear box 600 rpm, incl. flushing head
Water supply tank, pressure type, 10 litres incl. hose
Exhaust gas hose 4 meters keeps fumes away from working place

Drill range	Motor	Power	Speed range	Order No
Ø 107 - 200 mm	STIHL 2-stroke-motor	3,0KW (4,1 HP)	600 rpm	0295 200 6530
Ø 50 - 280 mm	CARDI T6-375 EL	3,42KW, 230V, 50hz, PRCO	230/520/965 rpm	0295 200 4350
Ø 107 - 200 mm	LSS64 air motor	2,7KW (3,7 HP) 3m ³ air usage	600 rpm	0295 200 6600

Accessories for KB200	Order No
Core tongs for core sample Ø 50mm	0296 000 0082
Core tongs for core sample Ø 100mm	0296 000 0088
Core tongs for core sample Ø 150mm	0296 000 0092
Core tongs for core sample Ø 200mm	0296 000 0096

GÖLZ KB300 / KB350 • Sewage pipe core drilling machine

- Drill rig, stroke 450mm, with self-centering pipe base foot for 90° and 45° holes
- Ground frame with 2 ground spikes for fixing the unit in the excavation area
- Strap and clamping ratchet for fixing the unit to uncovered sewage pipes
- STIHL 2-cycle engine, 3,0kw (4.1HP) enabling independent use of main supply systems
- Exhaust gas hose, approx. 4 meters, keeps fumes away from working area
- Drill range KB 300 110 - 290 mm / KB 350 110 - 354 mm
- Drillbit connection GÖLZ 3-hole-flange
- incl. 10 litre pressurised water tank
- weight: 40kg



KB300

Motor	Power	Speed range	Order No
STIHL 2-stroke-motor	3,0kW (4,1 HP)	300 rpm	0295 300 3540
T6-375 EL	3,42kW, 230V, 50hz, PRCD	230/520/965 rpm	0295 300 3330
LSS64 air motor	2,7kW (3,7PS), air usage 3m³/min	300 rpm	0295 300 3600
HBM100 hydraulic	4,5kW, oilflow 30 l/min, 140 bar	300 rpm	0295 300 3900

KB350

Motor	Power	Speed range	Order No
STIHL 2-stroke-motor	3,0kW (4,1 PS)	300 rpm	0295 350 3540
T6-375 EL	3,42kW, 230V, 50hz, PRCD	230/520/965 rpm	0295 350 2060
LSS64 air motor	2,7kW (3,7PS), air usage 3m³/min	300 rpm	0295 350 3600
HBM100 hydraulic	4,5kW, oilflow 30 l/min, 140 bar	300 rpm	0295 350 3900

Accessories	Oder No
Vacuum pump with electric motor, 230V	0295 010 0030
Excavator conversion kit	0295 300 0070
Set of vacuum pads for suction to smooth pipes	0295 300 0003
Set of standing plates for taking core samples	0295 300 0005
Set of roller guidance for standing plates	0295 300 0006
Frame extensions for pipes < DN 300	0295 300 0011
Support jack for drilling in pipes DN1000	0295 300 0014
Set of dowel plates with dowels and screws for KB300	0295 300 0007
Strap 2,1 m	0295 300 0053
Strap 4 m	0295 300 0054
Strap 8 m	0295 300 0058
Clamping ratchet	0295 300 0051
Exhaust gas hose 4m	0295 010 0014



excavator conversion kit

GÖLZ KB650 • Sewage pipe core drilling machine

For drilling from Ø300 - Ø660mm

Standard equipment for use in sewage systems

- Drill rig, stroke 450mm
- Manual feed
- Self centering pipe frame for pipes with outside Ø800 - 2000mm
- Fixing with 2 straps and 4 clamping ratchets (incl.) or alternative with wedge anchors
- Exhaust gas hose, approx. 4 meters, keeps fumes away from working place
- Water connection for supplying water to the drill bit
- Drill bit connection 1¼" UNC
- (LxWxH): 800x675x1020 mm
- Weight: 54kg (without drill bit)



Motor	Power	Speed range	Drill range	Order No
STIHL 2-stroke-motor	3,0kW (4,1 PS)	100 rpm	Ø 300-650 mm	0295 650 1010